

2021



F-150 Hybrid

**EMERGENCY RESPONSE  
GUIDE**



# TABLE OF CONTENTS

## INTRODUCTION

## SECTIONS

- 1: High Voltage Electrical System Information
- 2: Battery High Voltage System Depower
- 3: Supplemental Restraint System and Structural Reinforcement — Component Location
- 4: Approaching a Damaged Electric Vehicle
- 5: Damaged Vehicle Guidance and Storage

**NOTE:** The descriptions and specifications contained in this guide were in effect at the time this guide was approved for printing. Ford Motor Company reserves the right to discontinue models at any time, or change specifications or design without notice and without incurring any obligation.

All rights reserved. Reproduction by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system or translation in whole or part is not permitted without written authorization from Ford Motor Company.

Copyright © 2020, Ford Motor Company



## SECTION 0: Introduction

---

### Table of Contents

Contents	PAGE
<b>Introduction</b> .....	0-2
<b>About This Manual</b> .....	0-2
<b>Hybrid Identification — Vehicle Exterior</b> .....	0-2
<b>Vehicle Identification Number (VIN) Layout</b> .....	0-2

# Introduction

## Introduction

### About This Manual

The emergency response procedures for the F-150 hybrid vehicles are similar to those for traditional gasoline-powered vehicles with the addition of special considerations for the High Voltage electric system components.

These vehicles use a conventional gasoline engine in addition to an electric motor to power the vehicle.

- Gasoline is stored in a traditional fuel tank.
- Electricity is stored in a High Voltage battery pack.

The combination of a gasoline engine and electric motor provides for improved performance, reduced emissions and improved fuel economy. The vehicle system incorporates a generator that charges the High Voltage battery during cruising and braking.

The information in this guide will allow response to emergencies involving these vehicles to be as safe as non-hybrid vehicles.

These vehicles have been designed with many safety features for your protection. These features help provide safe access to the vehicle under various conditions. However when approaching an electric vehicle in a fire, rescue or recovery situation, always follow one industry standard rule:

**ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP!**

### Hybrid Identification — Vehicle Exterior

Hybrid vehicles are identified by the:

- "POWERBOOST" badge on the front door.
- Under-hood Orange High Voltage Cables



N0183319

## SECTION 1: High Voltage Electrical System Information

---

### Table of Contents

Contents	PAGE
Section 1: High Voltage Electrical System Information .....	1-2
High Voltage Electrical Disconnect Features .....	1-2
High Voltage Battery Packs .....	1-2
High Voltage Warning Decals .....	1-3
Component Location and Identification — Hybrid Vehicles .....	1-4

## Section 1: High Voltage Electrical System Information

### Section 1: High Voltage Electrical System Information

#### High Voltage Electrical Disconnect Features

 **WARNING:**

HYBRID VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THE FORD EMERGENCY RESPONSE GUIDE FOR THE VEHICLE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

The following features have been incorporated into these vehicles to allow for either simple or automatic shut-off of the High Voltage electrical systems.

- High voltage fuse — In the event of a High Voltage short circuit, the High Voltage fuse opens, isolating the High Voltage battery from the circuit.
- Any time the ignition is in the off position.
- If the ignition in the OFF Position and the 12 volt battery cables are disconnected, the High Voltage is isolated to the battery pack.
- In the event of a moderate to severe crash, the vehicle shutoff feature stops the flow of fuel to the engine, and deactivates the high voltage system. **PLEASE NOTE** not every crash will cause the vehicle to shutoff or High Voltage system deactivation.

#### High Voltage Battery Packs

 **WARNING:**

HYBRID VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THE FORD EMERGENCY RESPONSE GUIDE FOR THE VEHICLE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

FIRES IN CRASH-DAMAGED ELECTRIC VEHICLES MAY EMIT TOXIC OR COMBUSTIBLE GASSES. SMALL AMOUNTS OF EYE, SKIN OR LUNG IRRITANTS MAY BE PRESENT. WEAR PERSONAL PROTECTIVE EQUIPMENT (PPE) AND SELF-CONTAINED BREATHING APPARATUS WHEN WORKING IN CLOSE PROXIMITY OR IN A CONFINED AREA, SUCH AS A TUNNEL OR GARAGE. VENTILATE THE VEHICLE INTERIOR BY OPENING VEHICLE WINDOWS OR DOORS. VENTILATE THE WORKING AREA. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE BATTERY, THE BATTERY PACK REMAINS LIVE AND DANGEROUS. CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

#### Observe the following precautions when working on or around High Voltage batteries:

- Do not cut the High Voltage battery case. Do not penetrate the batteries or case in any way.
- The High Voltage battery pack is located under the vehicle.
- The total voltage of the vehicle HV battery pack may be up to approximately 450 volts DC.
- The battery case is water resistant.
- The battery cells contain liquid electrolyte absorbed in a porous special polymeric film. The electrolyte will not leak from the battery under most conditions. However, if the battery is crushed, it is possible for a small amount of electrolyte to leak.
- If possible, isolate and avoid contact with any electric vehicle components. If contact with the High Voltage system cannot be avoided, Personal Protective Equipment (PPE) such as a splash shield or safety goggles, gloves (butyl), an apron or overcoat, and rubber boots are required when handling damaged batteries. Exposure to electrolyte could cause skin and/or eye irritation/burns. If exposed, rinse with large amounts of water for 10-15 minutes.

## Section 1: High Voltage Electrical System Information

- If the battery is exposed to intense heat (or other extreme conditions), it is possible that flammable gases and liquid (electrolyte) have been released from the cells. Combustible hydrocarbons such as methane, toxic gases such as carbon monoxide, and very small amounts of eye/skin/lung irritants such as hydrofluoric acid could be released from the battery. Take appropriate precautions to make sure the area is properly ventilated. First responders should wear Personal Protective Equipment (PPE) and self-contained breathing apparatus to safeguard against thermal, electrical, respiratory and skin/eye hazards.

### High Voltage Warning Decals

- On hybrid vehicles WARNING decals are located on High Voltage components throughout the vehicle. See the following example.



N0181131

## Section 1: High Voltage Electrical System Information

 <b>DANGER / PELIGRO</b> <b>TEHLİKE / PERİGO</b> 危險 / خطر		 <b>HIGH VOLTAGE / HAUTE TENSION /</b> <b>ALTO VOLTAJE / YÜKSEK VOLTAJ</b> <b>/ ALTA TENSÃO / 高压 / توتر كهربائي عالي</b>	
      	<b>LIMM-C.F</b>		 <b>Li-Ion</b> 锂离子电池
Corrosive & Flammable Electrolyte causes injury. Keep out of the reach of children. Keep away from sparks or flame. Please recycle in accordance with local regulations.			
Électrolyte corrosif et inflammable – Risque de blessures. Garder hors de portée des enfants. Garder loin des étincelles ou des flammes. Recycler conformément aux règlements locaux.			
Electrolito corrosivo e inflamable que puede causar lesiones. Mantener fuera del alcance de los niños. Mantener alejado de chispas o llamas. Reciclar de acuerdo a las ordenanzas locales.			
Çürütücü ve ve Alevlenir Elektrolit yaralanmaya neden olur. Çocukların ulaşabileceği yerlerden uzak tutun. Kıvılcımlardan ve alevden uzak tutun. Lütfen yerel düzenlemeler uyarınca geri dönüşümünü sağlayın.			
Eletrólito corrosivo e inflamável, causa ferimentos. Mantenha longe do alcance de crianças. Mantenha afastada de faíscas ou chamas. Recicle de acordo com os regulamentos locais.			
腐蚀性与可燃性电解质会造成伤害。存放在儿童触摸不到的地方。存放在远离火花或火焰的地方。请依照当地法规进行回收利用。			
محلول كهربائي أقال وقابل للاشتعال بسبب الإصابة. عدم تركه في متناول الأطفال. يُحفظ بعيداً عن الشرارات أو اللهب. يرجى إعادة التدوير وفقاً للأنظمة المحلية.			
			KU5A-10661-AA 

N0181130

### Component Location and Identification — Hybrid Vehicles


The following illustrations provide the location, description and basic function of the High Voltage system components.

#### NOTE:


All High Voltage wires and harnesses are orange in color.

#### HEV Vehicles

# Section 1: High Voltage Electrical System Information

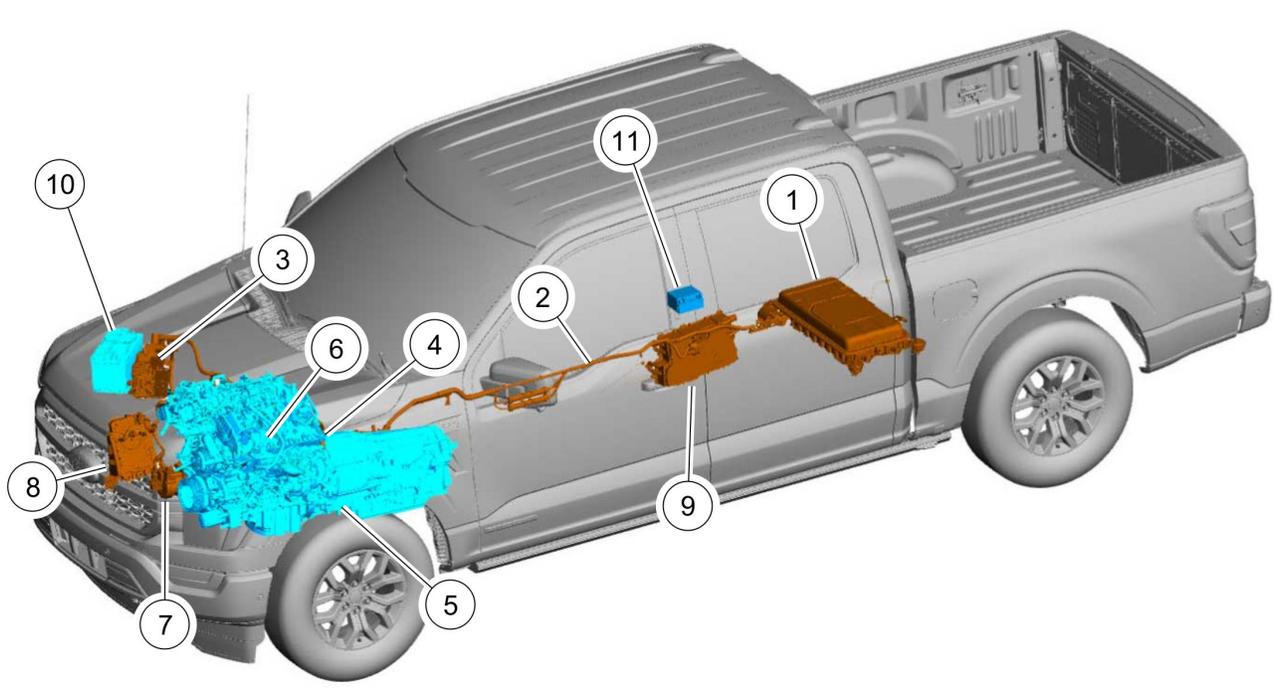

N0183343

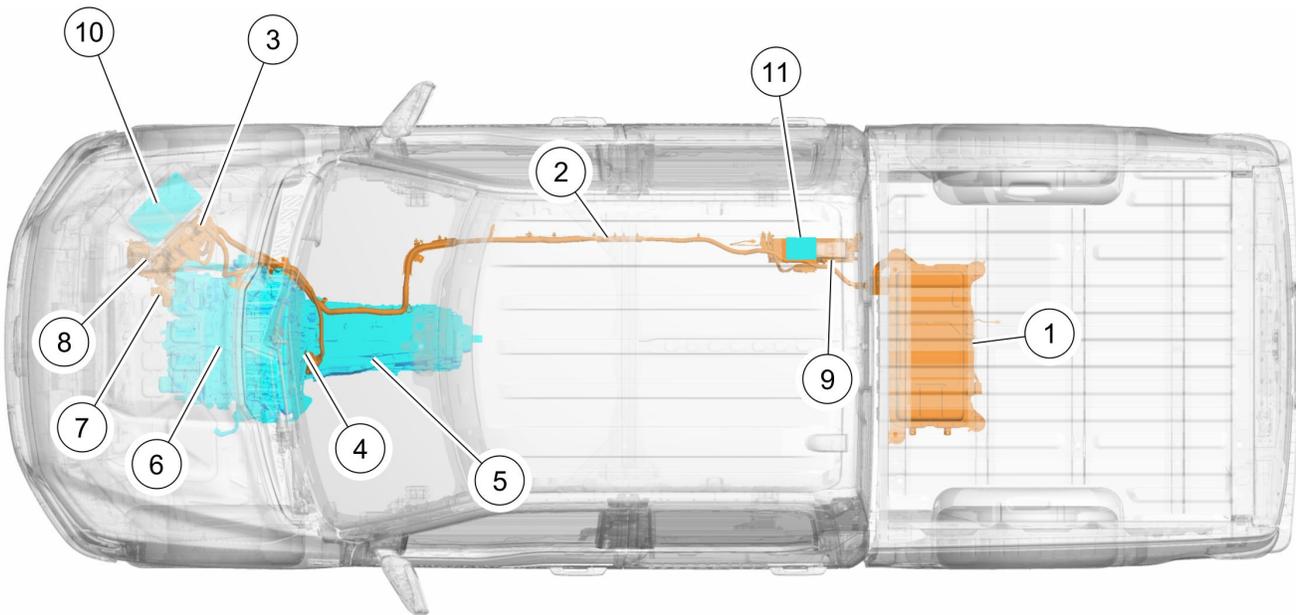

N0183344

## Section 1: High Voltage Electrical System Information

CALLOUT	COMPONENT	LOCATION / DESCRIPTION	FUNCTION
1	High Voltage Battery — Approximately up to 450 Volts DC	Located under the vehicle. Liquid cooled lithium ion battery.	Provides High Voltage storage for the vehicle electric motor and for the other High Voltage components.
2	High Voltage Wiring	Runs underneath the vehicle from the high voltage battery to the under hood engine compartment. All High Voltage wiring is orange in color.	Provides the physical connection between the High Voltage system and High Voltage components.
3	Inverter System Controller (ISC/ SOBDMC)	Under hood passenger side of vehicle.	Convert DC power to 3-Phase AC power to drive motor.
4	High Voltage Electric Motor / Front Module Hybrid Unit	Mounted between Engine and Transmission under vehicle.	Housing electric motor, torque convertor and clutch to connect and disconnect the electric motor. The electric motor provides traction to the vehicle and generate power to storage on the battery.
5	Electronically Controlled Transmission	Mounted next to the engine similar to non-hybrid vehicles.	This transmission includes a hybrid drive unit with a High Voltage electric motor and a integral disconnect clutch.
6	Gasoline Engine	Mounted in the engine compartment similar to non-hybrid vehicles.	This engine operates similar to non-hybrid vehicles.
7	Electric A/C Compressor	Located in front of the engine. It has an orange high-voltage wire attached to it.	Provides electric A/C operation. Replaces the belt driven A/C compressor.
8	DC/DC Converter	Located under the hood on the passenger side, mounted forward of and below Inverter System Controller (ISC).	Provides 12 volts to charge the 12-volt battery and run vehicle accessories.
9	Component: On Board Generator Inverter (OBGI)	Located under the vehicle in forward of the high-voltage battery on passenger frame rail.	To convert DC power to AC to power the "Pro-Power On Board" outlets in the bed and cabin of vehicle.
10	12 Volt Battery	Located under the hood on the passenger side of the vehicle.	The battery is a 12V DC source connected in a negative ground system and is a voltage stabilizer for the 12V electrical system.
11	12 Volt Auxiliary Battery	Located under the RH rear seat.	The auxiliary battery provides support for transient electrical loads that occur during a crank event when the main engine compartment battery is isolated from the rest of the vehicle and unable to provide transient support.

## SECTION 2: Battery High Voltage System Depower

---

### Table of Contents

Contents	PAGE
Section 2: Battery High Voltage System Depower .....	2-2
Battery High Voltage System Depower .....	2-2

## Section 2: Battery High Voltage System Depower

### Section 2: Battery High Voltage System Depower

#### Battery High Voltage System Depower

 **WARNING:**

THE HIGH-VOLTAGE SYSTEM MAY RETAIN A DANGEROUS LEVEL OF VOLTAGE FOR A SHORT TIME AFTER THE HIGH VOLTAGE SYSTEM IS DEPOWERED. WAIT 5 MINUTES FOR THE VOLTAGE TO DISSIPATE BEFORE BEGINNING SERVICE. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE BATTERY, THE BATTERY PACK REMAINS LIVE AND DANGEROUS. CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

ELECTRIC VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THIS SECTION. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

TO PREVENT THE RISK OF HIGH-VOLTAGE SHOCK, ALWAYS FOLLOW PRECISELY ALL WARNINGS AND SERVICE INSTRUCTIONS INCLUDING INSTRUCTIONS TO DEPOWER THE SYSTEM. THE HIGH-VOLTAGE SYSTEM UTILIZES VOLTAGE IN EXCESS OF 450 V DC. THIS VOLTAGE IS PROVIDED THROUGH HIGH-VOLTAGE CABLES TO ITS COMPONENTS AND MODULES. THE HIGH-VOLTAGE CABLES AND WIRING ARE IDENTIFIED BY ORANGE HARNESS TAPE OR ORANGE WIRE COVERING. ALL HIGH-VOLTAGE COMPONENTS ARE MARKED WITH HIGH-VOLTAGE WARNING LABELS WITH A HIGH-VOLTAGE SYMBOL. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

SERVICE OF THE HIGH VOLTAGE SYSTEM ON THIS VEHICLE IS RESTRICTED TO QUALIFIED PERSONNEL. THE REQUIRED QUALIFICATIONS VARY BY REGION. ALWAYS OBSERVE LOCAL LAWS AND LEGISLATIVE DIRECTIVES REGARDING ELECTRIC VEHICLE SERVICE. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **WARNING:**

DISCONNECT THE 12V BATTERY BEFORE SERVICING THE DIRECT CURRENT TO ALTERNATING CURRENT (DC-AC) INVERTER OR ALTERNATING CURRENT (AC) POWERPOINT TO PREVENT THE RISK OF HIGH VOLTAGE SHOCK. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY.

**NOTICE:**

Disconnecting the 12v battery alone does not necessarily disable the 12v power in the vehicle. The vehicle must be keyed off to ensure the DC/DC converter is not powering the 12v system.


1. Ensure the vehicle transmission gear selector is in the PARK position. Check that the vehicle ready light is off to verify the high voltage system is disconnected. If the vehicle ready light is on, press the Start button to turn off the ignition.
2. Open the hood.

**NOTICE:**

In a time sensitive situation the 12 volt battery negative and positive cables may be cut to save time, if the situation warrants. If time allows, make sure the positive battery terminal cover is in position while removing the negative battery cable clamp to prevent damage from a short to the positive terminal.

3. Loosen, but do not remove the nut. Position the negative battery cable aside.
  - a. Isolate the negative battery cable with electrical tape.

## Section 2: Battery High Voltage System Depower

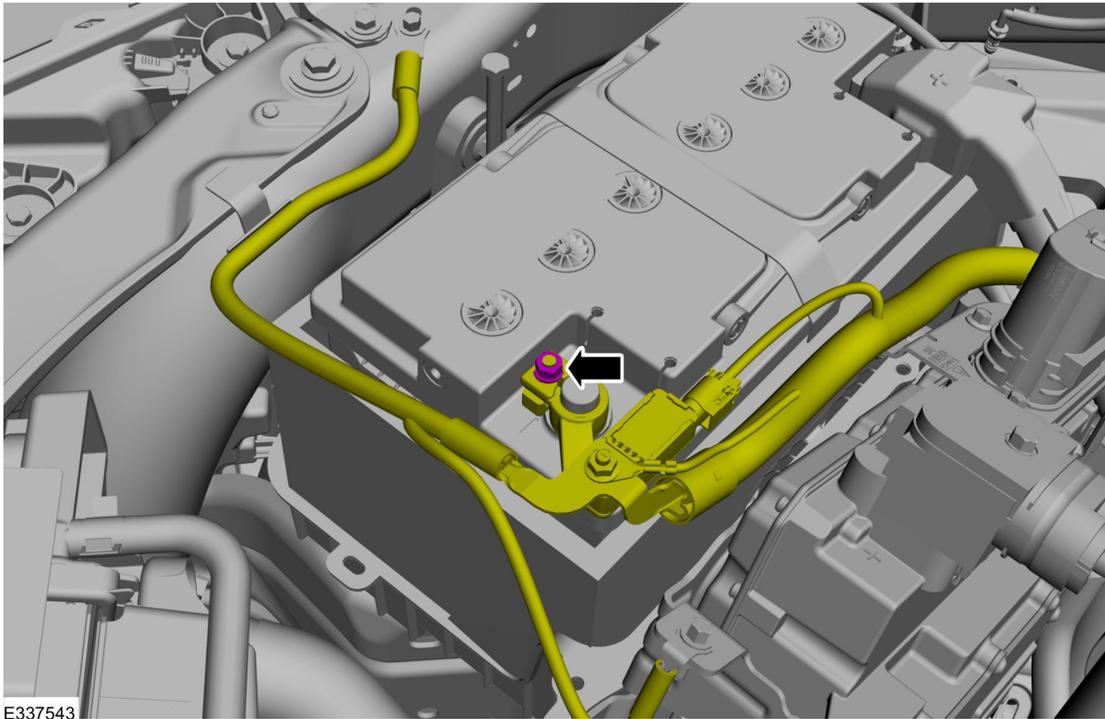


### Hybrid Vehicles with an auxiliary battery

4. Release the RH (right-hand) rear seat cushion latch. Then position the RH rear seat cushion upward.




## Section 2: Battery High Voltage System Depower

5. Release the taps, clips and position aside the aux battery cover.
  - a. Using electrical tape, cover the negative battery cable terminal.

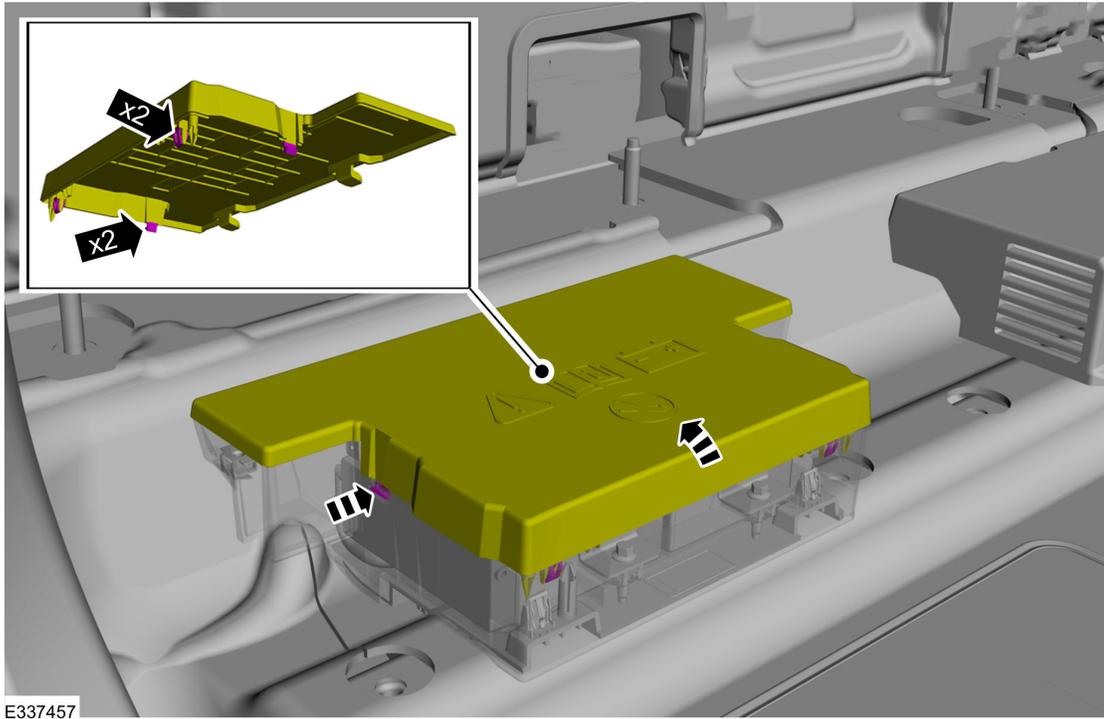

6. Disconnect the aux battery negative cable.


## Section 2: Battery High Voltage System Depower

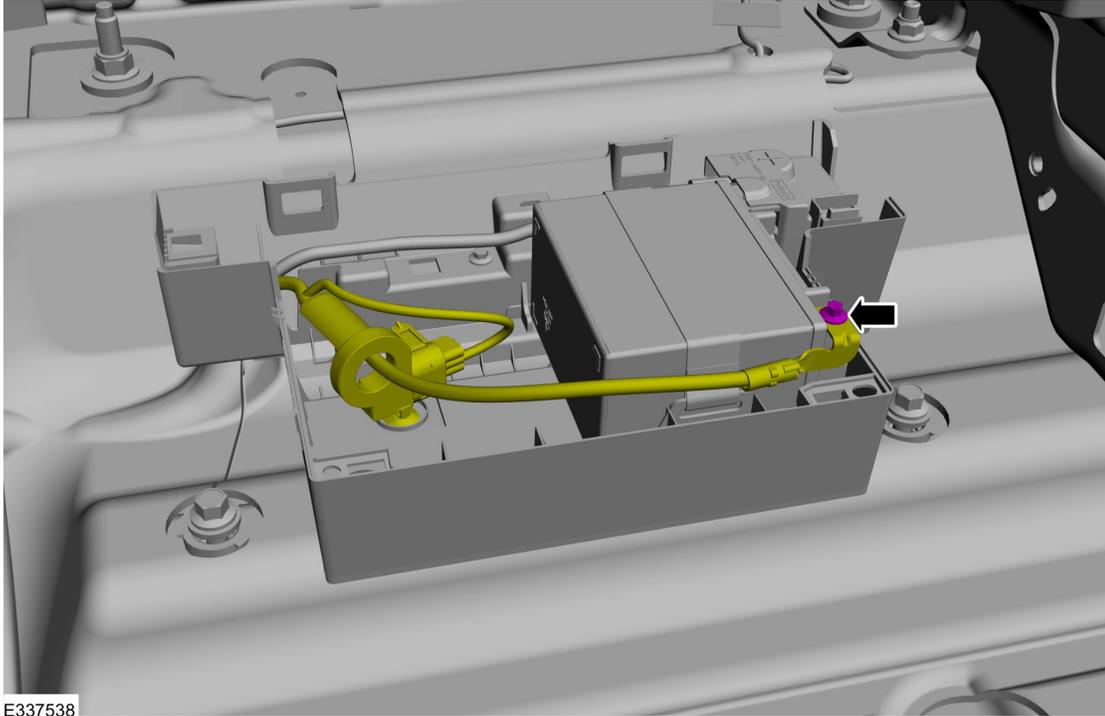**NOTICE:**


In a time sensitive situation the 12 volt battery negative and positive cables may be cut to save time, if the situation warrants. If time allows, be careful not to damage the battery monitoring sensor when removing the terminal from the battery post. Do not pry on the terminals or component damage may occur.

7. Locate the low-voltage service disconnect.

# Section 2: Battery High Voltage System Depower

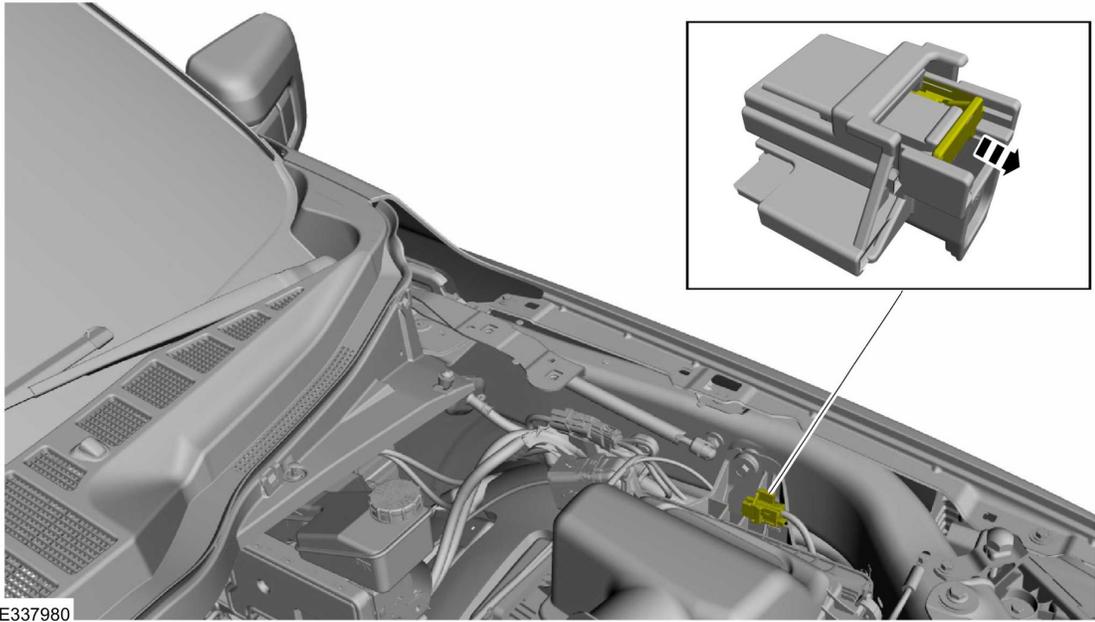

- 8. Depress the release tab and slide out until the OFF label is visible.

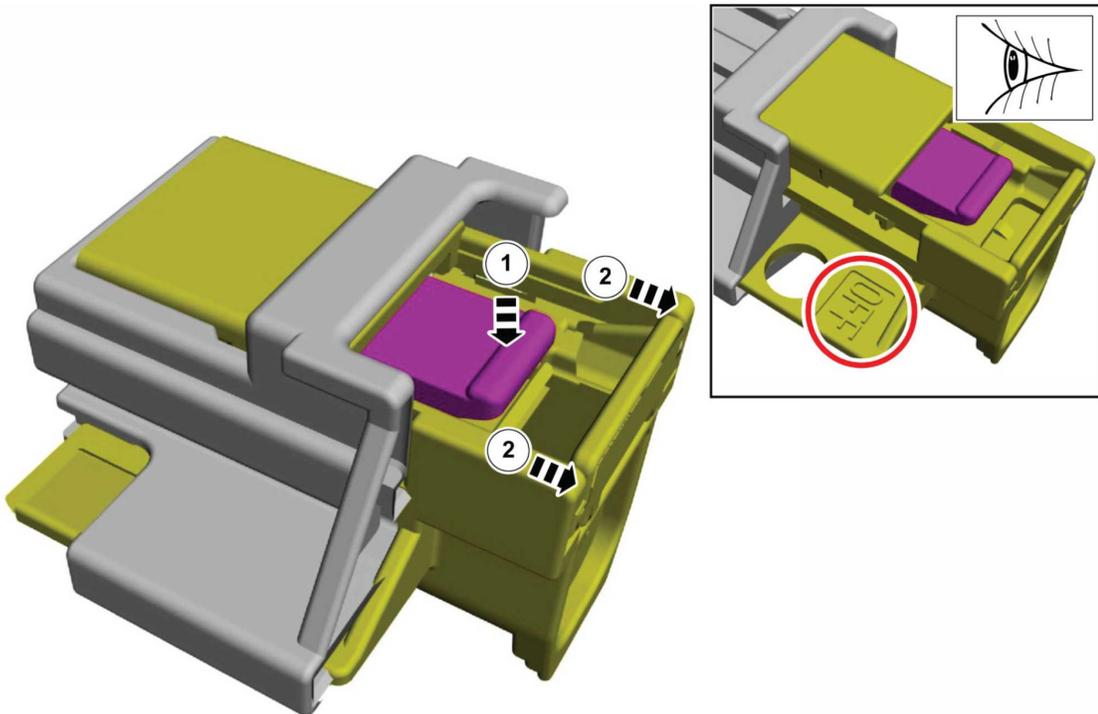

N0183321

- 9. Insert a suitable tool in the lock out to prevent reinsertion.

## Section 2: Battery High Voltage System Depower



E316331

**Table of Contents**

<b>Contents</b>	<b>PAGE</b>
Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location .....	3-2
<b>Pyrotechnic Device Health and Safety Precautions</b> .....	3-2
<b>Supplemental Restraint System Components — F-150 Vehicles</b> .....	3-3
<b>Reinforcements and High Strength Steel</b> .....	3-6

## Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

### Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

#### General Warnings for Extraction Procedures

 **WARNING:**

ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP! Cutting, crushing, or touching High Voltage components can result in serious injury or death.

 **WARNING:**

Always use appropriate tools, such as a hydraulic cutter, and always wear appropriate personal protective equipment (PPE) when cutting. Failure to follow these instructions can result in serious injury or death.

#### Pyrotechnic Device Health and Safety Precautions

 **WARNING:**

Pyrotechnic components are very hot immediately after deployment and might be covered with pyrotechnic residuals. Do not handle pyrotechnic components immediately after deployment. Always wear protective gloves, safety glasses and breathing protection to prevent skin contact and inhaling of pyrotechnic residuals. Failure to follow this instruction may result in serious personnel injury.

 **WARNING:**

Always carry a live airbag with the deployment door, trim cover or tear seam pointed away from the body. Do not place a live airbag down with the deployment door, trim cover or tear seam facing down. Failure to follow these instructions may result in serious personal injury in the event of an accidental deployment.

 **WARNING:**

Always carry a live Safety Canopy or side air curtain assembly with the tear seam pointed away from your body. Failure to follow this instruction may result in serious personal injury or death in the event of an accidental deployment.

 **WARNING:**

Never disassemble or tamper with seat belt deployable components, including pretensioners, load limiters and inflators. Never back probe deployable device electrical connectors. Tampering or back probing may cause an accidental deployment and result in personal injury or death.

 **WARNING:**

Never probe the electrical connectors on airbag, Safety Canopy or side air curtain assemblies. Failure to follow this instruction may result in the accidental deployment of these assemblies, which increases the risk of serious personal injury or death.

 **WARNING:**


Do not handle, move or change the original horizontal mounting position of the restraints control module (RCM) while the RCM is connected and the ignition switch is ON. Failure to follow this instruction may result in the accidental deployment of the Safety Canopy and cause serious personal injury or death.

 **WARNING:**

Service and handling of Pyrotechnic Components is restricted to qualified personnel. The required qualifications vary by region. Always observe local laws and legislative directives regarding Pyrotechnic Components service and handling. Failure to follow this instruction may result in serious personal injury or death.

## Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

### Supplemental Restraint System Components — F-150 Vehicles

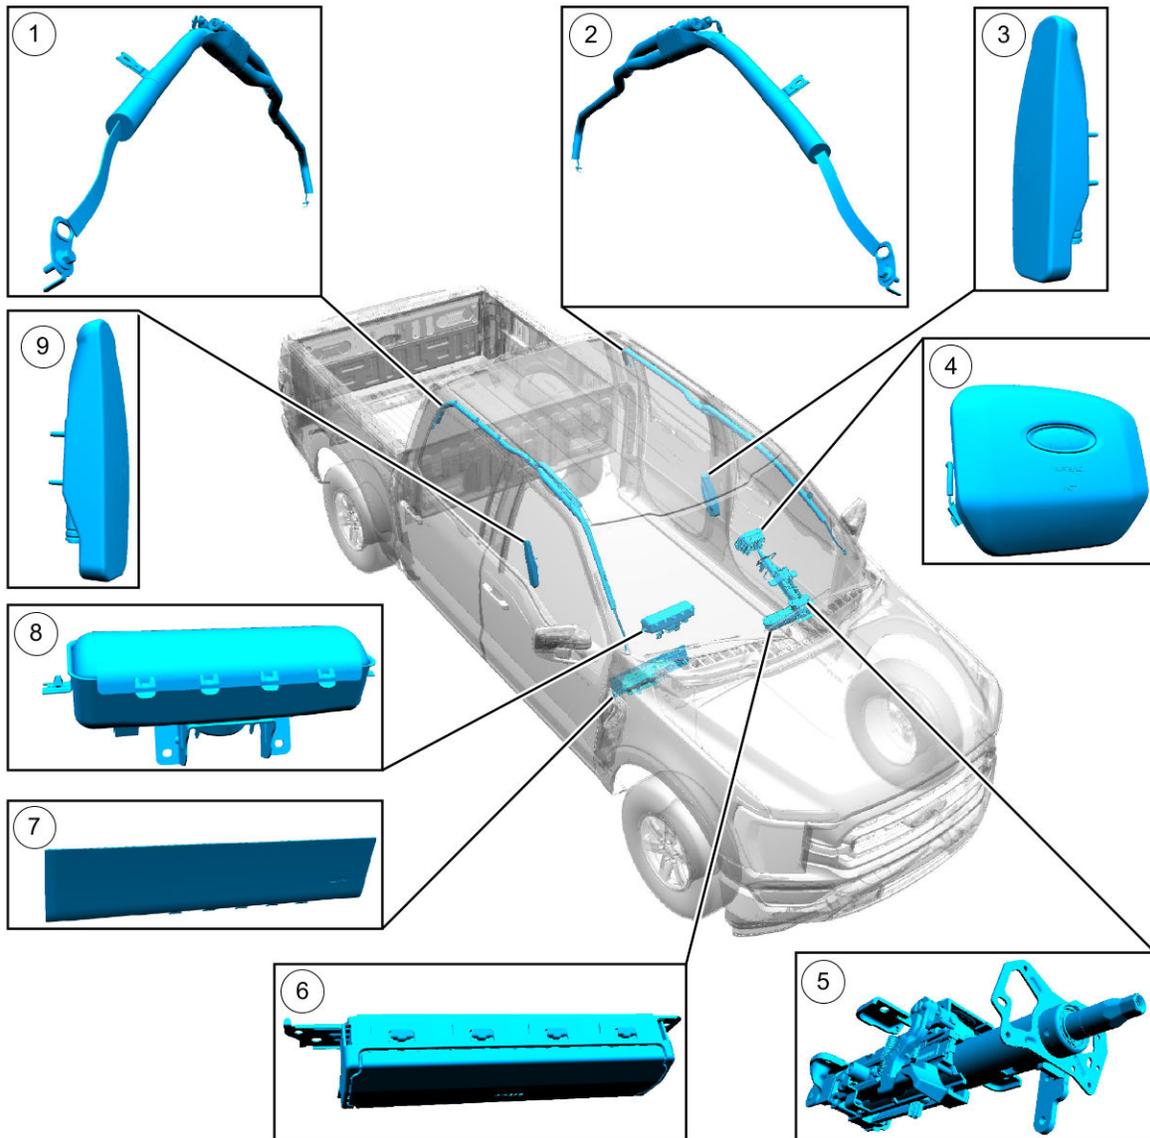


E328204

Item	Description
1	Passenger side curtain airbag
2	Driver side curtain airbag
3	Driver side airbag
4	Driver airbag
5	Adaptive energy absorption steering column
6	Driver knee airbag

## Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

(Continued)

7	Passenger knee airbag
8	Passenger airbag (includes canister vent)
9	Passenger side airbag

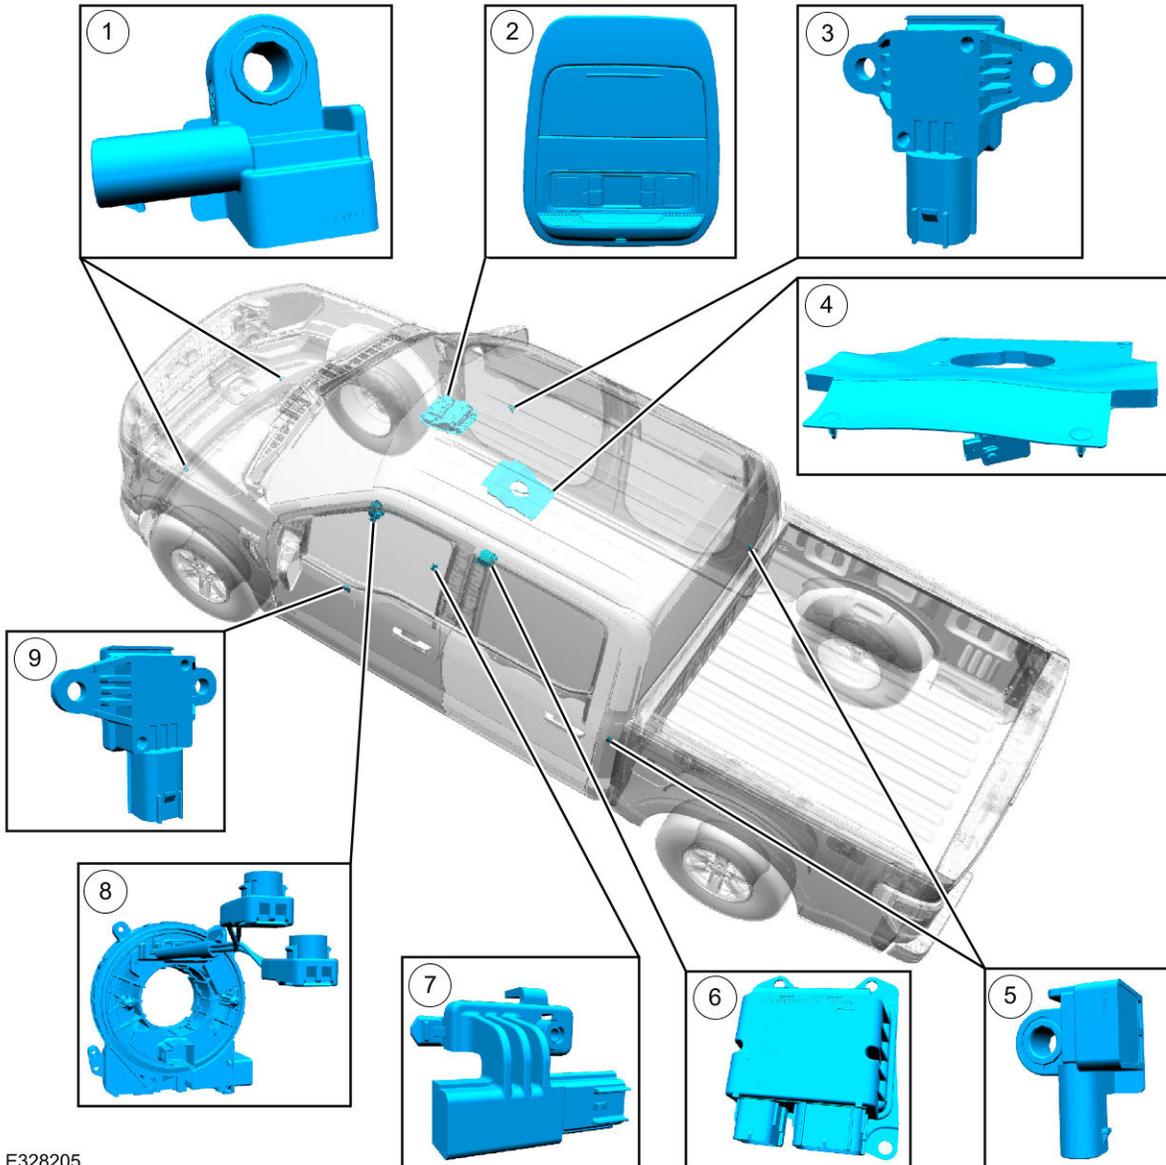


E328205

Item	Description
1	Driver and passenger front impact severity sensors
2	Overhead console (includes PAD indicator)
3	Passenger front door side impact sensor

## Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

(Continued)

4	OCSM (includes OCS sensor and gel-filled bladder)
5	Driver and passenger B-pillar side impact sensor (SuperCab / driver and passenger C-pillar side impact sensors (SuperCrew))
6	RCM
7	Driver seat position sensor
8	Clockspring
9	Driver front door side impact sensor

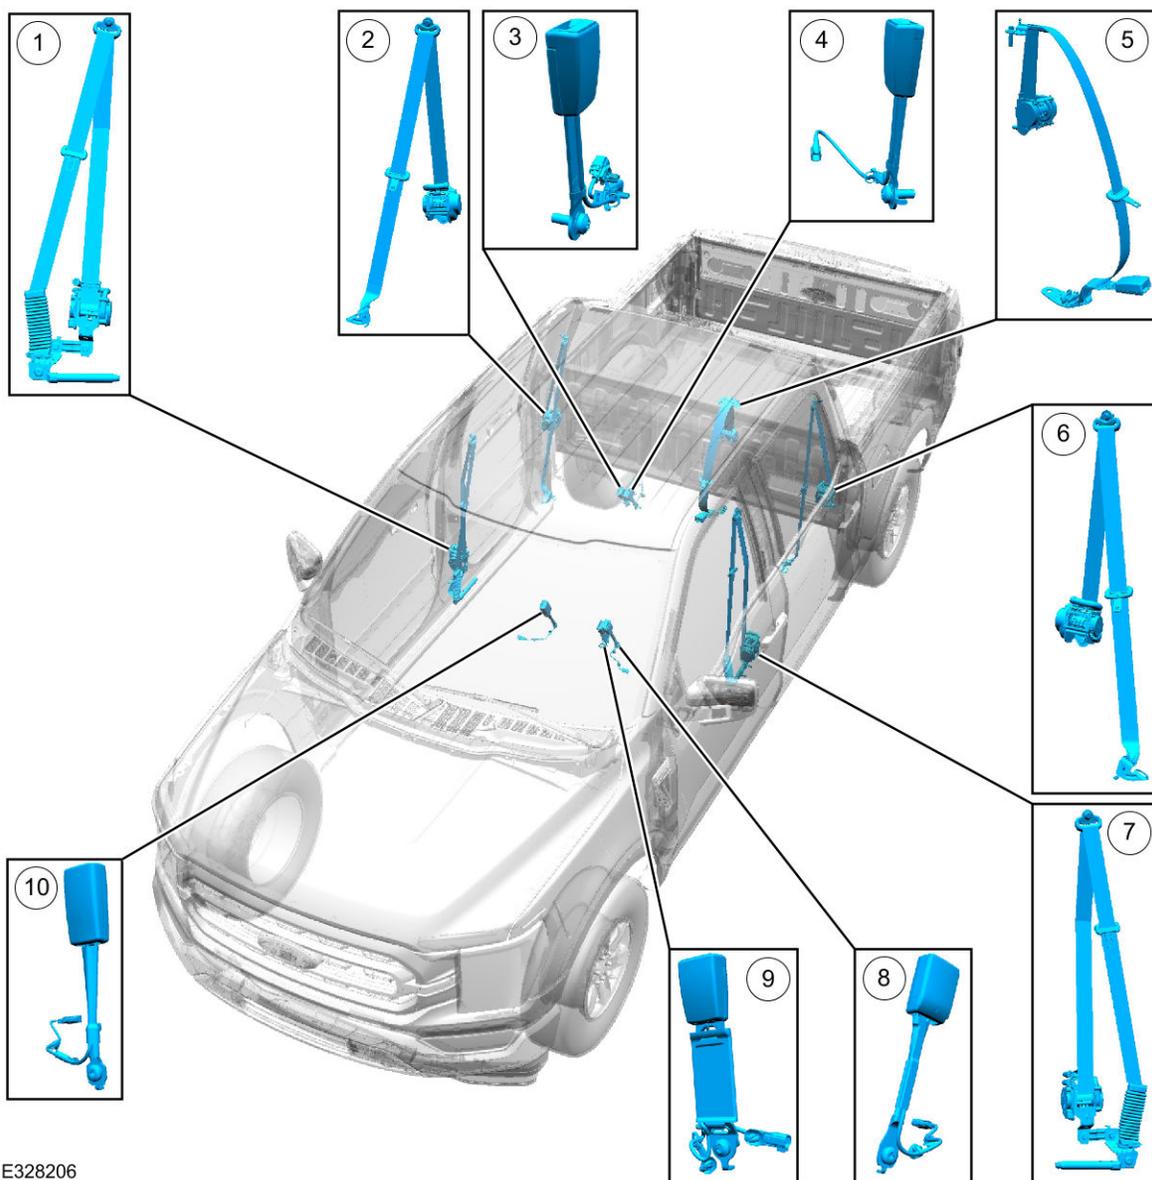

E328206

Item	Description
------	-------------

## Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

(Continued)

1	Front passenger seatbelt retractor and pretensioner (includes retractor load limiter and anchor pretensioner)(SuperCrew shown, other body styles similar)
2	Passenger rear outer seatbelt retractor and pretensioner (SuperCrew shown, SuperCab similar)
3	Passenger rear outlet setbelt buckle assembly (includes seatbelt buckle switch) (SuperCrew shown, SuperCab similar)
4	Rear center seatbelt buckle assembly (includes seatbelt buckle switch) (SuperCrew shown, SuperCab similar)
5	Driver rear seatbelt buckle (includes seatbelt buckle switch) (part of the rear center seatbelt retractor) (SuperCrew shown, SuperCab similar)
6	Driver rear outer seatbelt retractor and pretensioner (SuperCrew shown, SuperCab similar)
7	Driver seatbelt retractor and pretensioner (includes, retractor load limiter and anchor pretensioner) (SuperCrew shown, other body styles similar)
8	Driver seatbelt buckle (includes seatbelt buckle switch)
9	Front center seatbelt buckle (includes seatbelt buckle switch) (if equipped)
10	Front passenger seatbelt buckle (includes seatbelt buckle switch and Belt Tension Sensor [BTS])

### Reinforcements and High Strength Steel



**WARNING:**

**ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP!** Cutting, crushing, or touching High Voltage components can result in serious injury or death.




**WARNING:**

Always use appropriate tools, such as a hydraulic cutter, and always wear appropriate personal protective equipment (PPE) when cutting. Failure to follow these instructions can result in serious injury or death.


### Section 3: Supplemental Restraint System and Structural Reinforcement — Component Location

F-150 shown

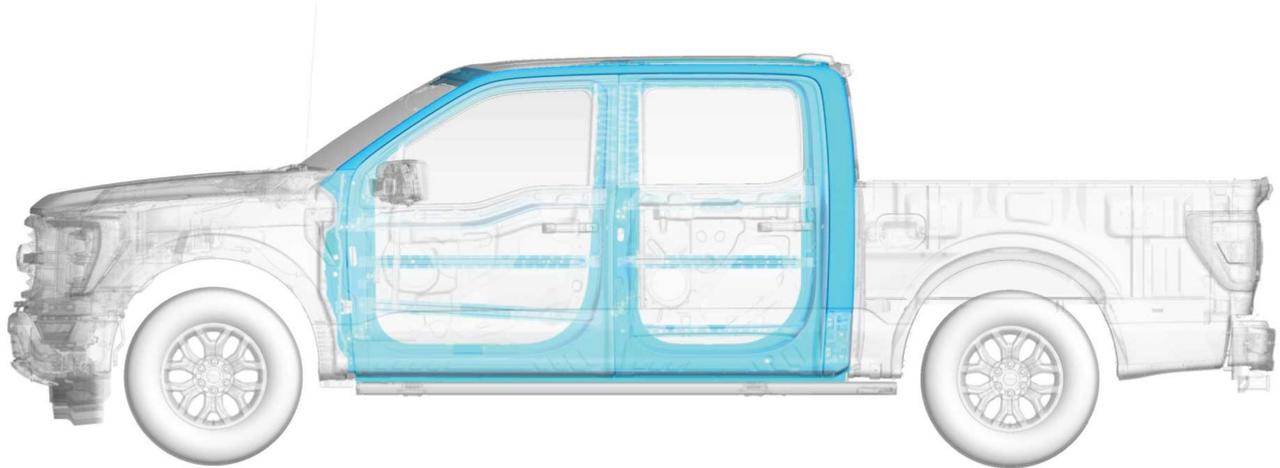

N0183341

F-150 with sunroof opening shown

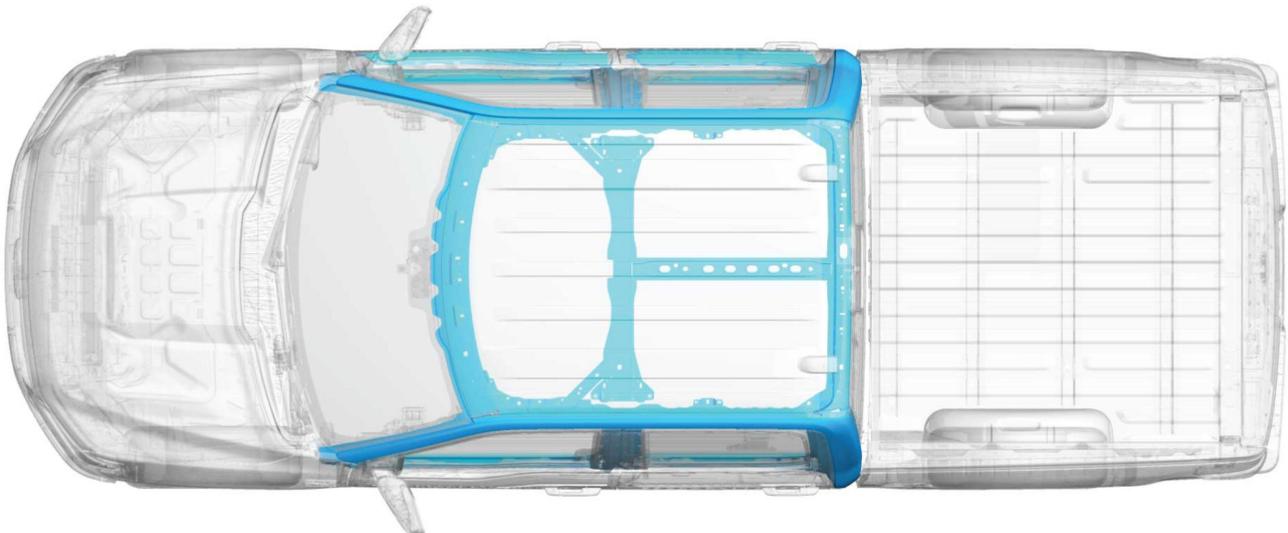

N0183342

## SECTION 4: Approaching a Damaged Electric Vehicle

---

### Table of Contents

Contents	PAGE
<b>Section 4: Approaching a Damaged Electric Vehicle</b> .....	4-2
<b>Follow Existing Training and Incident Commander Direction</b> .....	4-2
<b>Approaching a Damaged Vehicle</b> .....	4-2
<b>High Voltage System - Do Not Cut Zones</b> .....	4-3
<b>If The High Voltage Battery Case Has Been Ruptured</b> .....	4-3
<b>Moving Damaged Vehicles - Tow Truck Drivers</b> .....	4-3
<b>Electric and Hybrid Electric Vehicle Considerations</b> .....	4-4

## Section 4: Approaching a Damaged Electric Vehicle

### Section 4: Approaching a Damaged Electric Vehicle

#### **WARNING:**

HYBRID VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THE FORD EMERGENCY RESPONSE GUIDE FOR THE VEHICLE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

#### **WARNING:**

DAMAGED ELECTRIC VEHICLES SUBMERGED IN WATER PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. DO NOT ATTEMPT TO EXTRACT THE VEHICLE UNTIL THE HIGH VOLTAGE BATTERY HAS DISCHARGED INDICATED BY THE ABSENCE OF BUBBLING OR FIZZING. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

#### **WARNING:**

FIRES IN CRASH-DAMAGED ELECTRIC VEHICLES MAY EMIT TOXIC OR COMBUSTIBLE GASSES. SMALL AMOUNTS OF EYE, SKIN OR LUNG IRRITANTS MAY BE PRESENT. WEAR PERSONAL PROTECTIVE EQUIPMENT (PPE) AND SELF-CONTAINED BREATHING APPARATUS WHEN WORKING IN CLOSE PROXIMITY OR IN A CONFINED AREA, SUCH AS A TUNNEL OR GARAGE. VENTILATE THE VEHICLE INTERIOR BY OPENING VEHICLE WINDOWS OR DOORS. VENTILATE THE WORKING AREA. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

#### **WARNING:**

ELECTRIC VEHICLES WITH DAMAGED HIGH VOLTAGE BATTERIES REQUIRE SPECIAL HANDLING PRECAUTIONS. INSPECT THE VEHICLE CAREFULLY FOR LEAKING BATTERY FLUIDS, SPARKS, FLAMES, AND GURGLING OR BUBBLING SOUNDS. CONTACT EMERGENCY SERVICES IMMEDIATELY IF ANY OF THESE PROBLEMS ARE OBSERVED. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN A VEHICLE FIRE AND PERSONAL INJURY OR DEATH.

#### **WARNING:**

DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE BATTERY, THE BATTERY PACK REMAINS LIVE AND DANGEROUS. CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

### Follow Existing Training and Incident Commander Direction

Emergency responders should use **LARGE** amounts of water if fire is present or suspected and, keeping in mind that fire can occur for a considerable period after the crash, should proceed accordingly.

This guide provides only supplemental information as it pertains to these vehicles. The same rules apply when approaching any potential High Voltage situation. Always follow your High Voltage safety training. Some precautions to observe in a High Voltage situation include:

- Remove all jewelry such as watches, necklaces and earrings. Remove all metal objects that are conductors of electricity.
- Wear the necessary PPEs such as High Voltage rubber gloves, face shield, insulated boots, protective raincoat and apron.

Bring the following equipment:

- Class ABC powder-type fire extinguisher.
- A non-conductive object, about 1.5 m (5 ft) long, to safely push someone away from the vehicle if they accidentally come in contact with a damaged electric vehicle.

## Section 4: Approaching a Damaged Electric Vehicle

### Approaching a Damaged Vehicle

Disable the High Voltage electrical system using as many of the following steps as possible:

- **(MANDATORY)** Secure the vehicle: Ensure the vehicle transmission gear selector is in the PARK position. Check that the vehicle ready light is off to verify the High Voltage system is disconnected. If the vehicle ready light is on, press the Start button to turn off the ignition. **PLEASE NOTE: The vehicle high voltage system could still be energized even if the ready light is not on. In accessory mode, the ready light is not present but the high voltage system is energized under normal operation.**
- **(MANDATORY)** First, turn off the charge unit. Then, attempt to remove the High Voltage Charge Cord if connected to the vehicle. If the plug will not release please refer to High Voltage. Charge Cord Lock Manual Release, in Section 3 of this guide.
- **(MANDATORY)** Disconnect the 12 volts battery terminals to isolate the HV system. For additional information, refer to High Voltage System Depower procedures in this manual.
- **(MANDATORY)** If the vehicle is on fire, use a Class ABC powder-type extinguisher to contain and smother the flames. If water is being used, LARGE amounts of water is required to extinguish the flames. A fire-hydrant or dedicated fire hose can supply the needed amount. Water can cause some degree of arcing/shorting across the cell and/or battery terminals; it can also react with the electrolyte from the cells to generate additional combustible gas and other byproducts such as hydrofluoric acid. However, the cooling and smothering effects of flushing the affected article with large amounts of water and/or other fire suppression material is still beneficial for minimizing the severity of the event.
- **(MANDATORY)** If the vehicle has any exposed cables, wear High Voltage rubber gloves and other appropriate PPE. Do not touch any broken or damaged High Voltage orange cables. Treat severed cables as if they contain High Voltage.
- **(MANDATORY)** If the vehicle is submerged in water, varying degrees of arcing/shorting within the battery will take place. Do not touch any High Voltage components or orange cables while removing the occupant(s). Do not remove the vehicle until you are sure the High Voltage battery is completely discharged. A submerged High Voltage battery may produce a fizzing or bubbling reaction to the water. If fizzing or bubbling is observed, the High Voltage battery will be discharged when the fizzing or bubbling has completely stopped. The battery should still be treated as if it is not discharged.
- If necessary, apply the parking brake and/or block the wheels to prevent vehicle movement.
- The vehicle has an electric parking brake. You operate it with a switch instead of a lever. The switch is on the center console or to the left hand side of the steering wheel, on the lower part of the instrument panel.

### High Voltage System - Do Not Cut Zones

- If possible, depower the High Voltage system before attempting any removal procedure. Always assume the High Voltage cabling and components are powered up.
- If occupant removal is necessary, always use caution when cutting near the vehicle High Voltage system components. Do not cut any of the High Voltage under vehicle or under hood cabling (all High Voltage cabling is orange). High voltage cabling runs underneath the vehicle, from the High Voltage batteries under the left hand side of the vehicle to the underhood compartments. The vehicle charge port is located on the left front fender. Refer to the diagram below for the no cut zones. **See Section 1 for illustrations.**

### If The High Voltage Battery Case Has Been Ruptured

Just like any other battery, hose down the area with **LARGE** amounts of water.

### Moving Damaged Vehicles - Tow Truck Drivers

#### **NOTICE:**

**Do not attempt to pull / tow vehicle with wheels on the ground as this may cause the vehicle to generate electricity and can cause potential damage.**

- Disconnect the 12 volts battery terminals to isolate the HV system. For additional information, refer to High Voltage System Depower procedures in this manual.
- Rather than attempt to discharge a High Voltage battery, an emergency responder, tow truck operator, or storage facility manager should contact experts at the vehicle manufacturer.
- Operators of tow trucks and vehicle storage facilities should make sure the damaged vehicle is kept in an open area instead of inside a garage or other enclosed building.

#### **Follow the guidelines in the Wrecker Towing Guide:**

- If you detect leaking fluids, sparks, smoke, flames, increased temperature, gurgling, popping or hissing noises from the High Voltage battery compartment, ventilate the area and call 911.
- Be alert. There is potential for delayed fire with damaged lithium-ion batteries.
- Call an authorized Ford dealer or vehicle manufacturer representative, if necessary, to determine the additional steps to take to safely recover or transport the vehicle.
- Always approach the vehicle from the sides to stay out of potential travel path. It may be difficult to determine if the vehicle is running due to lack of engine noise.
- Place vehicle into park, set the parking brake, turn off the vehicle, activate the hazard lights, and remove the key fobs to a distance at least 16 feet from the vehicle until loading the vehicle for transport.
- Refer to vehicle manual/recovery guide to locate proper attachment/connection points and transport method.
- Avoid contact with orange High Voltage cabling and areas identified as High Voltage risk by warning labels.

## Section 4: Approaching a Damaged Electric Vehicle

### Electric and Hybrid Electric Vehicle Considerations

In the event of damage to or fire involving an electric vehicle.

- Always assume the High Voltage battery and associated components are energized and fully charged.
- Exposed electrical components, wires, and High Voltage batteries present potential HV shock hazards.
- Venting/off-gassing High Voltage battery vapors are potentially toxic and flammable.
- Physical damage to the vehicle or High Voltage battery may result in immediate or delayed release of toxic and/or flammable gases and fire.

**Table of Contents**

<b>Contents</b>	<b>PAGE</b>
<b>Section 6: Damaged Vehicle Guidance and Storage</b> .....	5-2
<b>Damaged Vehicle Guidance for Ford Motor Company Electric and Hybrid-Electric Vehicles Equipped with High Voltage Batteries</b> .....	5-2
<b>Vehicle Storage</b> .....	5-2

## Section 6: Damaged Vehicle Guidance and Storage

### Section 6: Damaged Vehicle Guidance and Storage

#### Damaged Vehicle Guidance for Ford Motor Company Electric and Hybrid-Electric Vehicles Equipped with High Voltage Batteries

(Towing and Recovery Operators and Vehicle Storage Facilities)

In the event of damage or fire involving an Electric Vehicle (EV) or Hybrid-Electric Vehicle (HEV):

- Always assume the High Voltage battery and associated components are energized and fully charged.
- Exposed electrical components, wires and High Voltage batteries present potential High Voltage shock hazards.
- Venting/off-gassing High Voltage battery vapors are potentially toxic and flammable.
- Physical damage to the vehicle or High Voltage battery may result in immediate or delayed release of toxic and/or flammable gases and fire.

#### Identifying Vehicle for High Voltage System Disabling and Vehicle Shutdown

- Determine if the vehicle is an electric or hybrid-electric vehicle, and if it is, advise your dispatch and all other responders that an electric or hybrid-electric vehicle is involved.
- To identify potential symptoms of a damaged High Voltage system, contact an authorized service center or vehicle manufacturer representative. Refer to the vehicle Owner Manual, Emergency Placard (included in the vehicle Owner Manual) and/or the Emergency Response Guide for appropriate contact information.
- If you detect leaking fluids, sparks, smoke, flames, increased temperature, gurgling, popping or hissing noises from the High Voltage battery compartment, ventilate the passenger area (such as, roll down windows or open doors) and call 911.
- Be alert. There is a potential for delayed fire with damaged lithium-ion batteries.

#### Vehicle Recovery/Transportation

- Call an authorized service center or the vehicle manufacturer, if necessary, to determine additional steps that should be taken to safely recover or transport the vehicle.
- Always approach the vehicle from the sides to stay out of potential travel path. It may be difficult to determine if the vehicle is running due to lack of engine noise.
- Place vehicle into park (P), set the parking brake, turn off the vehicle, activate hazard lights, and remove the keys to a distance at least 5 m (16 ft) from the vehicle until loading the vehicle for transport.
- Refer to the vehicle owner manual/recovery guide to locate proper attachment/connection points and transport method.
- Avoid contact with orange High Voltage cabling and areas identified as High Voltage risk by warning labels.

#### Vehicle Storage

- **Contact an authorized Ford or Lincoln Dealer as soon as possible as there may be additional steps necessary to secure, discharge, handle, and/or store the High Voltage battery and vehicle.**
- Do not store a severely damaged vehicle with a lithium-ion battery inside a structure or within 15 m (50 ft) of any structure or vehicle.
- Make sure the passenger and cargo compartments remain ventilated.
- Prior to placing vehicle in storage, and while located in storage area/tow lot, continue to inspect vehicle for leaking fluids, sparks, smoke, flames, gurgling or bubbling sounds from the High Voltage battery and call 911 if any of these are detected.
- Maintain clear access to stored vehicles for monitoring and emergency response if needed.

For specific information and safety preparation regarding the High Voltage system, refer to [WWW.MOTORCRAFTSERVICE.COM](http://WWW.MOTORCRAFTSERVICE.COM), select quick guides for the appropriate vehicle emergency response guide.

#### **NOTICE:**

**Do not attempt to pull / tow vehicle with wheels on the ground as this may cause the vehicle to generate electricity and can cause potential damage.**



#### **WARNING:**

**ELECTRIC VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THE FORD EMERGENCY RESPONSE GUIDE FOR THE VEHICLE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.**

## Section 6: Damaged Vehicle Guidance and Storage

### **WARNING:**

DAMAGED ELECTRIC VEHICLES SUBMERGED IN WATER PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. DO NOT ATTEMPT TO EXTRACT THE VEHICLE UNTIL THE HIGH VOLTAGE BATTERY HAS DISCHARGED INDICATED BY THE ABSENCE OF BUBBLING OR FIZZING. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

### **WARNING:**

FIRES IN CRASH-DAMAGED ELECTRIC VEHICLES MAY EMIT TOXIC OR COMBUSTIBLE GASSES. SMALL AMOUNTS OF EYE, SKIN OR LUNG IRRITANTS MAY BE PRESENT. WEAR PERSONAL PROTECTIVE EQUIPMENT (PPE) AND SELF-CONTAINED BREATHING APPARATUS WHEN WORKING IN CLOSE PROXIMITY OR IN A CONFINED AREA, SUCH AS A TUNNEL OR GARAGE. VENTILATE THE VEHICLE INTERIOR BY OPENING VEHICLE WINDOWS OR DOORS. VENTILATE THE WORKING AREA. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

### **WARNING:**

ELECTRIC VEHICLES WITH DAMAGED HIGH VOLTAGE BATTERIES REQUIRE SPECIAL HANDLING PRECAUTIONS. INSPECT THE VEHICLE CAREFULLY FOR LEAKING BATTERY FLUIDS, SPARKS, FLAMES, AND GURGLING OR BUBBLING SOUNDS. CONTACT EMERGENCY SERVICES IMMEDIATELY IF ANY OF THESE PROBLEMS ARE OBSERVED. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN A VEHICLE FIRE AND PERSONAL INJURY OR DEATH.


### **DAMAGED BATTERY ELECTRIC VEHICLE STORAGE PLACARD**

- If the vehicle and/or battery High Voltage system is damaged, place a sign indicating that it is a battery electric vehicle with potentially dangerous High Voltage. See example below:

## Section 6: Damaged Vehicle Guidance and Storage

DO NOT TOUCH!

WARNING: BATTERY ELECTRIC  
VEHICLE WITH POSSIBLE HIGH  
VOLTAGE SYSTEM DAMAGE.

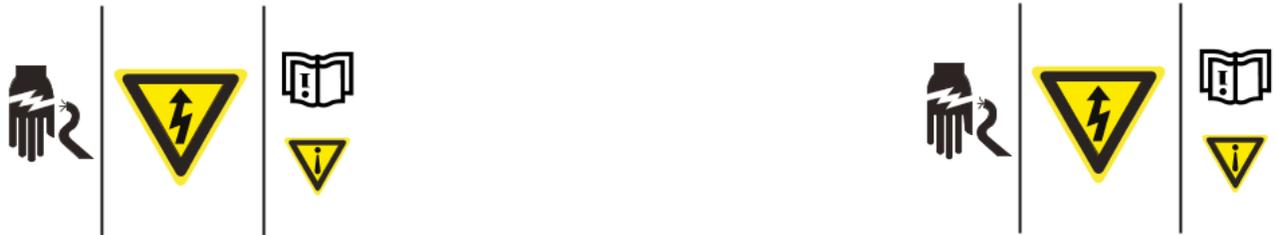

WARNING: BATTERY ELECTRIC  
VEHICLE WITH POSSIBLE HIGH  
VOLTAGE SYSTEM DAMAGE.

DO NOT TOUCH!

N0179841

Copyright 2020, Ford Motor Company. All rights reserved. This document may be reproduced in its entirety and distributed for emergency responder use only. It may not be excerpted for any purpose.